


Specification for coating under tiles

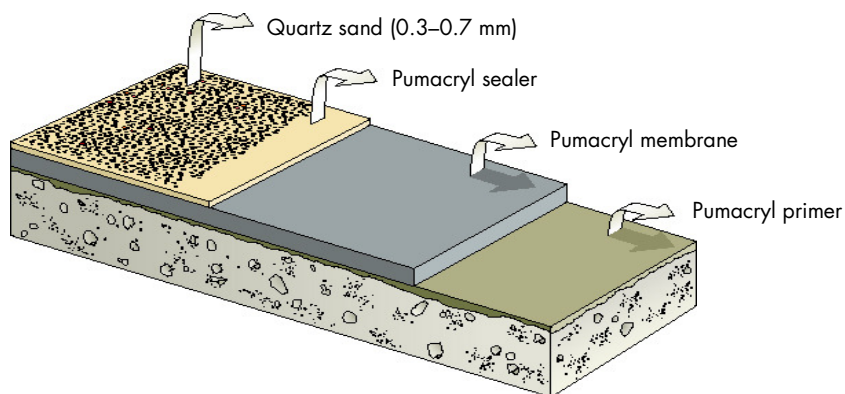

Primer

On concrete / screed:	PUMACRYL PRIMER or PRIMER H	approx. 0.3 kg/m ²
On metal / tiles:	PUMACRYL PRIMER CM	approx. 0.25 kg/m ²

Membrane

On top of primer:	PUMACRYL MEMBRANE / MEMBRANE THIX	2.0 kg/m ²
-------------------	--------------------------------------	-----------------------

Adhesion coat

On top of membrane:	PUMACRYL STC 307	0.5 kg/m ²
for tile fixing: broadcasting:	Quartz sand (0.3-0.7 mm)	1.0 kg/m ²

The consumption depends on porosity and structure of the substrate.

The consumptions are valid for an application at +20 °C.

For details please refer to respective technical data sheet of each product.

HEADOFFICE AND INTERNATIONAL SALES:

Vandex International Ltd
P.O. Box, CH-4501 Solothurn/Switzerland
Phone +41 32 626 36 36, Fax +41 32 626 36 37
info@vandex.com www.vandex.com

PRODUCTION AND SALES GERMANY / AUSTRIA:

Vandex Isoliermittel GmbH
P.P. Box 1406, D-21493 Schwarzenbek / Germany
Phone +49 4151 89 50-0, Fax +49 4151 89 15 50
info@vandex.de www.vandex.de