


### Specification for car parking structures

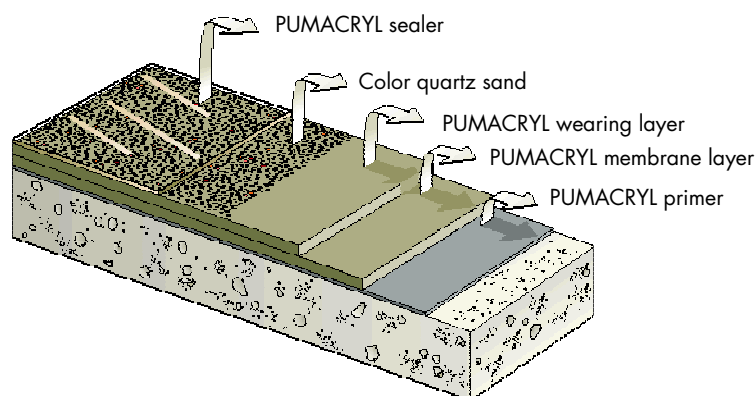

#### Primer

On concrete / screed:	PUMACRYL PRIMER or PRIMER H	approx. 0.3 kg/m <sup>2</sup>
On top of asphalt (*):	PUMACRYL MEMBRANE 1st layer	approx. 1.0 kg/m <sup>2</sup>
On top of metal / tiles:	PUMACRYL PRIMER CM	approx. 0.25 kg/m <sup>2</sup>
On top of timber:	PUMACRYL PRIMER	approx. 0.3 kg/m <sup>2</sup>

(\*) low tar content

#### Outdoor parking and drive areas

On top of primer: membrane:	PUMACRYL MEMBRANE	1.5–2.0 kg/m <sup>2</sup>
Wearing layer:	PUMACRYL MEMBRANE	2.0 kg/m <sup>2</sup>
Filler:	Quartz sand (0.1–0.4 mm)	2.0 kg
Broadcasting:	e.g. bauxite (0.9–1.5 mm)	approx. 4.0 kg/m <sup>2</sup>
Sealer:	PUMACRYL STC 307	0.5 kg/m <sup>2</sup>

#### Indoor parking and drive areas

On top of primer: membrane (optional)	PUMACRYL MEMBRANE	1.5–2.0 kg/m <sup>2</sup>
Wearing layer:	PUMACRYL MEMBRANE	1.5–2.0 kg/m <sup>2</sup>
Filler:	Quartz sand (0.1–0.4 mm)	1.5–2.0 kg/m <sup>2</sup>
Broadcasting:	Quartz sand (0.3–0.8 mm)	approx. 3.0 kg/m <sup>2</sup>
Sealer:	PUMACRYL STC 307	approx. 0.5 kg/m <sup>2</sup>

#### HEADOFFICE AND INTERNATIONAL SALES:

Vandex International Ltd  
P.O. Box, CH-4501 Solothurn/Switzerland  
Phone +41 32 626 36 36, Fax +41 32 626 36 37  
info@vandex.com www.vandex.com

#### PRODUCTION AND SALES GERMANY / AUSTRIA:

Vandex Isoliermittel GmbH  
P.P. Box 1406, D-21493 Schwarzenbek / Germany  
Phone +49 4151 89 50-0, Fax +49 4151 89 15 50  
info@vandex.de www.vandex.de

### Ramps and turning circles (indoor / outdoor)

On top of primer: membrane:	PUMACRYL MEMBRANE	1.5–2.0 kg/m <sup>2</sup>
Wearing layer:	PUMACRYL MEMBRANE	2.0–3.0 kg/m <sup>2</sup>
Filler:	Quartz sand (0.1–0.4 mm)	2.0–3.0 kg/m <sup>2</sup>
Dry sprinkling:	e.g. bauxite (0.9–1.5 mm)	4.0–6.0 kg/m <sup>2</sup>
Sealer:	PUMACRYL STC 307	0.5 kg/m <sup>2</sup>

The consumption depends on porosity and structure of the substrate.

The consumptions are valid for an application at +20 °C.

For details please refer to respective technical data sheet of each product.

---

**HEADOFFICE AND INTERNATIONAL SALES:**

Vandex International Ltd  
P.O. Box, CH-4501 Solothurn/Switzerland  
Phone +41 32 626 36 36, Fax +41 32 626 36 37  
info@vandex.com www.vandex.com

**PRODUCTION AND SALES GERMANY / AUSTRIA:**

Vandex Isoliermittel GmbH  
P.P. Box 1406, D-21493 Schwarzenbek / Germany  
Phone +49 4151 89 50-0, Fax +49 4151 89 15 50  
info@vandex.de www.vandex.de